



RSL NDT LTD.

SUBSEA & TOPSIDE – EQUIPMENT & CONSUMABLES

Aberdeen & Sheffield

Website: www.rsln dt.com

E-Mail: info@rsln dt.com

Tel: 01224 822600

Page 1 of 2

SCUMPI (Self Contained Underwater MPI) SYSTEM

Developed by RSL the SCUMPI System is a completely Self Contained Underwater MPI System. Safety features such as the 12 volt Lamp and Electromagnet are carried over from the RSL Umbilical System. The ink bag features an enclosed pump for operation and ink agitation yet can be changed out on site in a couple of minutes.


The system has been specifically developed for work on RIB's or where electrical isolation poses a problem. With a continuous operating time of 5-6 hours and an ink capacity of 9 litres, the SCUMPI System will be capable of performing extended MPI Inspection compared to other non-umbilical methods.

Specifications are below:

LAUNCH FRAME

Made of lightweight tubular construction, the frame serves two functions. Firstly keeping the whole system together as a compact module and secondly providing protection for the subsea power pod, ink bag and light during deployment or cross hauling through a structure. The lifting point is Dye Penetrant inspected and the shackle and lifting strop are both issued with certificates.

Length 650mm x Width 360mm x Height 260mm

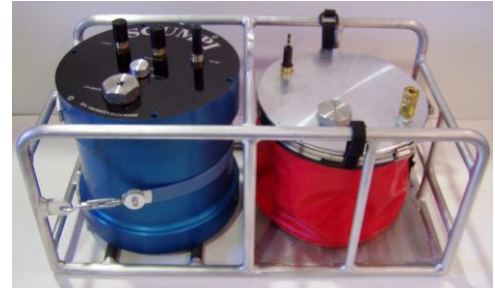

SUBSEA UNIT

Housing:	Anodized Aluminium
Dimensions:	300mm diameter x 260mm overall height
Weight in air:	15Kg
Weight in water:	3Kg
Operating Time:	5-6 Hours Continuous
Charging Time:	10 Hours



INK BAG/PUMP

All in one system with the pump located in the sealed Ink Bag
The complete assembly can be changed out in a few minutes
Ink agitation via internal pump
Size: Height 260mm x Diameter 300mm
Capacity: 9 Litres
Weight Full in air: 9KG





RSL NDT LTD.

SUBSEA & TOPSIDE – EQUIPMENT & CONSUMABLES

Aberdeen & Sheffield

Website: www.rsln dt.com

E-Mail: info@rsln dt.com

Tel: 01224 822600

Page 2 of 2

SCUMPI SYSTEM – SPECIFICATIONS CONTINUED

U/V LAMP/INK DISPENSER

Type:	LED U/V output
Warm up Time:	Not required
Working Voltage:	12 Volts
Light Output:	Conforms to BS EN ISO 3059
Weight in air:	1.8 KG
Dimensions:	Length 280mm x 110mm OD



ELECTROMAGNET

Dimensions:	200mm x 155mm x 50mm
Weight in air:	2.2KG
Pole Dimensions:	20mm x 20mm
Operation:	On/Off Switch



Both the U/V Lamp and Electromagnet are 12Volt DC working for enhanced diver safety

